

142-2036

**DETHATCH RAKE ATTACHMENT
46 INCH**

**For Serial Nos.
406,294,345 and Higher**
Part No. 4504-507 Rev. A

Operator's Manual

Introduction

To the Owner

Introduction

Read this manual entirely BEFORE operating the Z-Plug equipment.

The information presented herein will prepare you to operate the Z-Plug equipment in a safe and knowledgeable manner. Operating the Z-Plug equipment in a proper manner will provide a safer working environment, create more efficient results and promote higher quality.

Keep this manual on hand at all times for ready reference. The tested safety and design(s) of the Z-Plug equipment is dependent upon its operation within the guidelines and limitations outlined in this manual. Operating the Z-Plug equipment outside of the stated safety guidelines presented in this manual run the risk of injury and a void in the warranty.

Product Registration

Immediately record the model and serial number of the Z-Plug equipment in the spaces below. These numbers can be found on the back side of the frame. Providing this information will help assure that you get the correct parts, informed about any updates or product reviews.

Model Number:

Serial Number:

Contents

Introduction	2
To the Owner.....	2
Safety	4
Safety Alert Symbol.....	4
Safe Operating Practices.....	4
Safety and Instructional Decals	6
Specifications	7
Systems.....	7
Dimensions.....	7
Setup	8
Accessory Removal	8
Install Accessory	8
Operation	9
Dethatching Operations	9
Remove Accessory	9
Maintenance	10
Periodic Maintenance	10
Troubleshooting	11
California Proposition 65 Warning Information	12

Safety

Safety Alert Symbol

This Safety Alert Symbol (Figure 1) is used both in this manual and on the machine to identify important safety messages which must be followed to avoid accidents.

This symbol means: **ATTENTION! BECOME ALERT! YOUR SAFETY IS INVOLVED!**



g000502

Figure 1
Safety Alert Symbol

The safety alert symbol appears above information which alerts you to unsafe actions or situations and will be followed by the word **DANGER**, **WARNING**, or **CAUTION**.

DANGER: Indicates an imminently hazardous situation which, if not avoided, **Will** result in death or serious injury.

WARNING: Indicates a potentially hazardous situation which, if not avoided, **Could** result in death or serious injury.

CAUTION: Indicates a potentially hazardous situation which, if not avoided, **May** result in minor or moderate injury.

This manual uses two other words to highlight information. **Important** calls attention to special mechanical information and **Note** emphasizes general information worthy of special attention.

Safe Operating Practices

Always shut off the engine, and remove the key. Wait for all movement to stop and allow the machine to cool before adjusting, cleaning, storing, or repairing it.

The intended use of this accessory is for lawn care.

Training

- Read the Z-Plug Operator's Manual along with this accessory manual and other training material. If the operator(s) or mechanic(s) can not read the

manuals it is the owner's responsibility to explain this material to them; other languages may be available on our website.

- Become familiar with the safe operation of the equipment, operator controls, and safety signs.
- All operators and mechanics should be trained. The owner is responsible for training the users.
- Never let children or untrained people operate or service the equipment. Local regulations may restrict the age of the operator.
- Only adults and mature teenagers should operate the spreader-sprayer, and even mature teenagers should have adult supervision. Be sure a teenager:
 1. has read and understands the Operator's Manual and recognizes the risks involved;
 2. is sufficiently mature to use caution; and
 3. is of sufficient size and weight to operate the controls comfortably and to manage the spreader-sprayer without taking risks.
- The owner/user can prevent and is responsible for accidents or injuries occurring to himself or herself, other people or property.

Preparation

- Do Not modify the accessory.
- Evaluate the terrain to determine what accessories and attachments are needed to properly and safely perform the job. Only use on machines approved by the manufacturer.
- Wear appropriate clothing including safety glasses, substantial footwear, and hearing protection.

▲ CAUTION

The machine that this accessory attaches to produces sound levels in excess of 85 dBA at the operator's ear and can cause hearing loss through extended periods of exposure.

Wear hearing protection when operating this machine.

- Inspect the area where the equipment is to be used and remove all rocks, toys, sticks, wires, bones, and other foreign objects which can be thrown by the machine and may cause personal injury to the operator or bystanders.

Operation

⚠ WARNING

Hands, feet, hair, clothing, or accessories can become entangled in rotating parts. Contact with the rotating parts can cause traumatic amputation or severe lacerations.

- **Do Not operate the machine without guards, shields, and safety devices in place and working properly.**
- **Keep hands, feet, hair, jewelry, or clothing away from rotating parts.**
- Raise the accessory, slow down, and use caution when crossing surfaces other than grass and when transporting the machine to and from the work area.
- Use extreme care when loading or unloading the machine into a trailer or truck.

Maintenance and Storage

- Raise the accessory, set the parking brake, stop engine and remove key or disconnect spark plug wire. Wait for all movement to stop before adjusting, cleaning or repairing.
- Use care when checking and servicing tines. Wrap the tine(s) or wear gloves, and use caution when servicing them. Only replace damaged tines. Never straighten or weld them.
- Keep all guards, shields and all safety devices in place and in safe working condition.
- Check all bolts frequently to maintain proper tightness.
- Frequently check for worn or deteriorating components that could create a hazard.

Safety and Instructional Decals

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.
For more information, please visit www.ttcoCAProp65.com

133-8061

decal133-8061

133-8061

Specifications

Systems

Dethatch System

Three rows of offset spring loaded tines

Dimensions

Overall Width:

46 inches (117 cm)

Overall Length:

31 inches (79 cm)

Overall Height:

22 inches (56 cm)

Weight:

305 lb (138 kg)

Setup

Accessory Removal

Remove any mid-mount accessory that is currently on the machine; refer to the Z-Plug Operator's manual and the installed accessory Operator's manual for instructions.

Install Accessory

1. Drive the Z-Plug machine to the rear of the attachment. Position the rear wheel to the middle of the accessory. Slowly start turning the machine over the Dethatch Rake attachment (make sure that you line up the ball swivel in the neck of the attachment and the pull pin beneath the nose of the traction unit to make it easy for mounting).

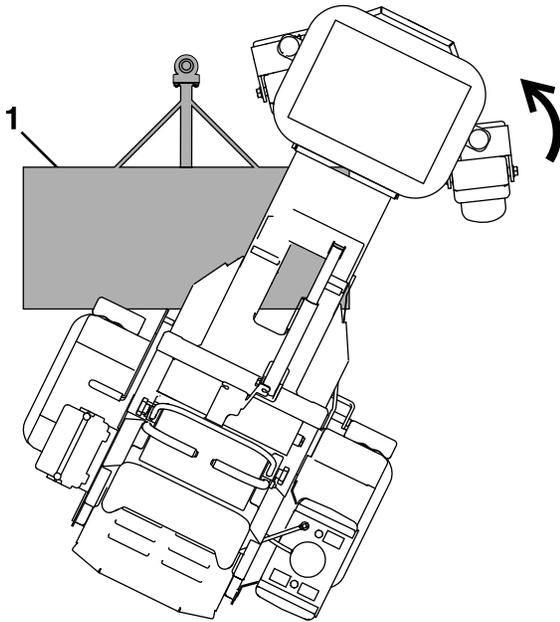


Figure 2

g203242

1. Turning towards accessory

2. Shut off the engine and wait for all movement to stop.
3. Install Dethatch Upright Neck on the front pull pin and secure with lynch pin.

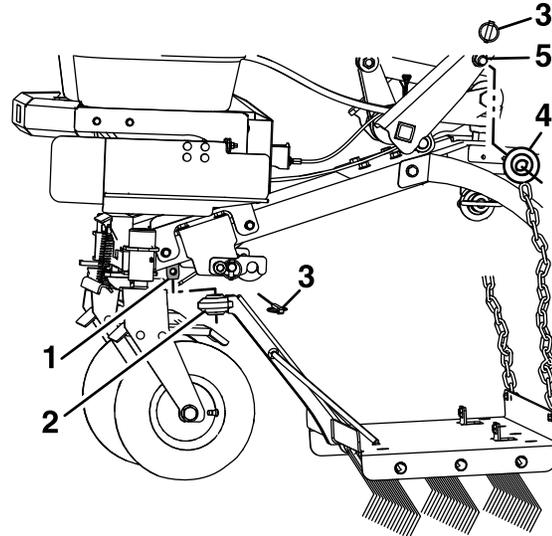


Figure 3

g201438

1. Lift Arm Pin
2. Dethatch Upright Neck
3. Lynch Pin
4. Swivel
5. Lift Arm

4. Install the two chains onto the left and right Lift Arms and secure with Lynch Pins to secure the accessory to the machine.

Operation

Dethatching Operations

Operation

When you arrive to desired working area, use the hydraulic Lift Valve Lever (or Thumb Switch) to lower the accessory into the turf. Once you have come to a designated turnaround location, use hydraulic Lift Valve Lever to lift accessory head in transport position. Make designated turn and repeat process of lowering the accessory into turf.

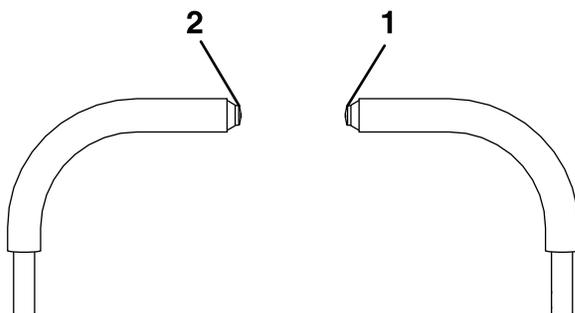


Figure 4

g286617

1. RH motion control thumb switch raises accessory
2. LH motion control thumb switch lowers accessory

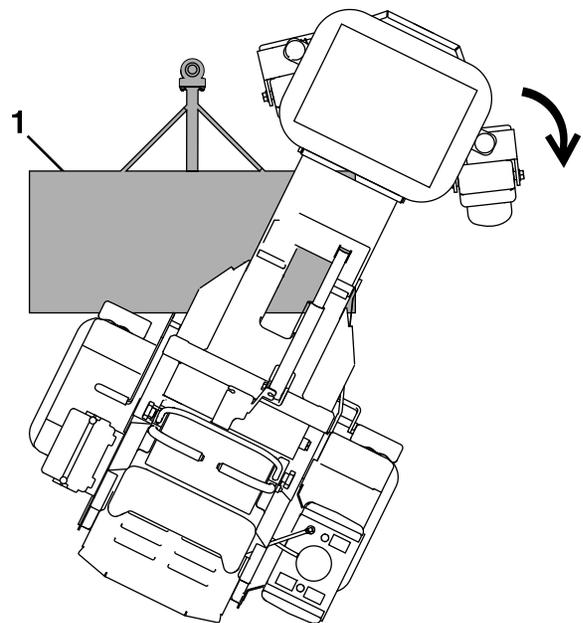


Figure 5

g298889

Remove Accessory

1. Adjust the hydraulic cylinder so that the attachment starts to make contact with the ground (taking weight off of the head).
2. Shut off engine, wait for all moving parts to stop, remove key, and disconnect battery.
3. Remove lynch pin and ball swivels at the top of the chains from lift arms.
4. Remove lynch pin from the front pull pin and remove the ball swivel from the pin.
5. Block up the accessory so it can be stored safely and will make future reinstallation easier.
6. Position yourself back on the traction unit. Drive away from the accessory head (reference Figure 5) by turning the front of the traction unit in either direction.

Maintenance

Always shut off the engine, and remove the key. Wait for all movement to stop and allow the machine to cool before adjusting, cleaning, storing, or repairing it.

Periodic Maintenance

Check to ensure that rakes are not bent, twisted or broke before each use.

Ensure that all collars are tight and adjusted properly.

Troubleshooting

Make sure that the space between the rakes are cleaned and do not have dirt/turf build up. Enough build up of debris will cause the rakes to give unsatisfactory results.

California Proposition 65 Warning Information

What is this warning?

You may see a product for sale that has a warning label like the following:



WARNING: Cancer and Reproductive Harm—www.p65Warnings.ca.gov.

What is Prop 65?

Prop 65 applies to any company operating in California, selling products in California, or manufacturing products that may be sold in or brought into California. It mandates that the Governor of California maintain and publish a list of chemicals known to cause cancer, birth defects, and/or other reproductive harm. The list, which is updated annually, includes hundreds of chemicals found in many everyday items. The purpose of Prop 65 is to inform the public about exposure to these chemicals.

Prop 65 does not ban the sale of products containing these chemicals but instead requires warnings on any product, product packaging, or literature with the product. Moreover, a Prop 65 warning does not mean that a product is in violation of any product safety standards or requirements. In fact, the California government has clarified that a Prop 65 warning “is not the same as a regulatory decision that a product is ‘safe’ or ‘unsafe.’” Many of these chemicals have been used in everyday products for years without documented harm. For more information, go to <https://oag.ca.gov/prop65/faqs-view-all>.

A Prop 65 warning means that a company has either (1) evaluated the exposure and has concluded that it exceeds the “no significant risk level”; or (2) has chosen to provide a warning based on its understanding about the presence of a listed chemical without attempting to evaluate the exposure.

Does this law apply everywhere?

Prop 65 warnings are required under California law only. These warnings are seen throughout California in a wide range of settings, including but not limited to restaurants, grocery stores, hotels, schools, and hospitals, and on a wide variety of products. Additionally, some online and mail order retailers provide Prop 65 warnings on their websites or in catalogs.

How do the California warnings compare to federal limits?

Prop 65 standards are often more stringent than federal and international standards. There are various substances that require a Prop 65 warning at levels that are far lower than federal action limits. For example, the Prop 65 standard for warnings for lead is 0.5 µg/day, which is well below the federal and international standards.

Why don't all similar products carry the warning?

- Products sold in California require Prop 65 labelling while similar products sold elsewhere do not.
- A company involved in a Prop 65 lawsuit reaching a settlement may be required to use Prop 65 warnings for its products, but other companies making similar products may have no such requirement.
- The enforcement of Prop 65 is inconsistent.
- Companies may elect not to provide warnings because they conclude that they are not required to do so under Prop 65; a lack of warnings for a product does not mean that the product is free of listed chemicals at similar levels.

Why does Exmark include this warning?

Exmark has chosen to provide consumers with as much information as possible so that they can make informed decisions about the products they buy and use. Exmark provides warnings in certain cases based on its knowledge of the presence of one or more listed chemicals without evaluating the level of exposure, as not all the listed chemicals provide exposure limit requirements. While the exposure from Exmark products may be negligible or well within the “no significant risk” range, out of an abundance of caution, Exmark has elected to provide the Prop 65 warnings. Moreover, if Exmark does not provide these warnings, it could be sued by the State of California or by private parties seeking to enforce Prop 65 and subject to substantial penalties.

Notes:

Notes:

Place Model No. and Serial No.
Label Here (Included in the Literature
Pack) or Fill in Below

Model No. _____

Serial No. _____

Date Purchased _____

Engine Model No. and Spec. No. _____

Engine Serial No. (E/No) _____

©2019 Exmark Mfg. Co., Inc.
2101 Ashland Ave
Beatrice, NE 68310
All Rights Reserved

Part No. 4504-507 Rev. A
(402) 223-6375
Fax (402) 223-5489
Printed in the USA

